



PERFECT ENGINEERING SERVICES

2/2-3/2 Way Pneumatic Diaphragm Operated Control Valve upto 450 °C

Perfect Engineering Offers 2/2-3/2 Way Pneumatic Diaphragm Operated Thermic Fluid Control Valves.

Size range - ½" to 12" Flanged Ends

VALVE SPECIFICATION


Characteristics	Linear/Equal percentage/On-off (quick opening)
End connection	Flanged ends ASME B16.5 CL 150/300/600
Pressure Rating	ASME B16.5 CL 150/300/600
Temperature	Upto 450 degrees
Leakage class	Metal to metal seating

FEATURES

- Precise Regulation with high flow capacity
- Large type of trim top operating design for various duty conditions
- In line repairable design for easy maintenance
- Tight closure even in extreme operating conditions
- Wide range of actuators to meet different application

ACCESSORIES

- 3/2 solenoid valve in all standard coil voltage
- Electro pneumatic valve positioner
- Limit switch on/off indication at panel board
- Filter + Regulator combination with Pressure gauge

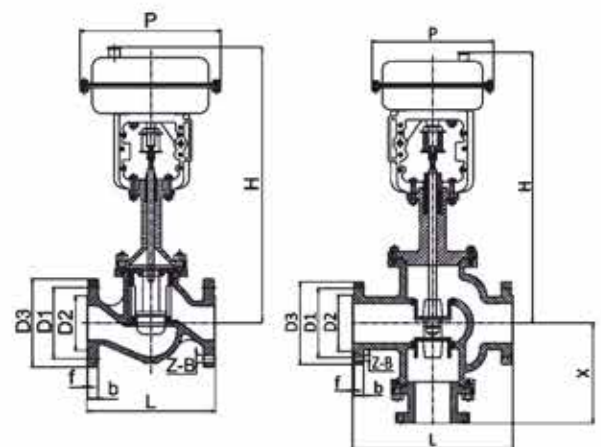

*Owing to continuous improvements, product specifications and dimensions are subject to change

HEAD OFFICE:

PERFECT ENGINEERING SERVICES

C-601, Badhwar Apartments, Plot No.3, Sector-6, Dwarka, New Delhi-110075

Ph: 011 - 28034280/81 | +91-9891016735 / +91-9350216735 | +91-9999991337 | +91-9811557391

vksood@perfect.org.in | sales@perfect.org.in | info@perfect.org.in | solutions@perfect.org.in

www.perfectengineeringservices.co.in